MAXUS

SAIC MAXUS Europe SARL
12c, Rue Guillaume Kroll
L-1882 Luxembourg

All pictures, specifications and data in this brochure are for illustrative purposes only and do not constitute a binding offer. The specifications and configurations are subject to change without prior notice. The final configuration shall be subject to the signed sales contract.
© 2026 MAXUS. All rights reserved.

MAXUS

2026 MAXUS EUROPE PRODUCT BROCHURE

Driving a Sustainable Future, MAXUS Opens More Possibilities Ahead

Driven by 5 global technical centers, MAXUS develops 2 major technology platforms and leverages its 3 top-tier manufacturing bases. Our R&D and production footprint now spans 17 countries and regions. We provide a full-scenario product portfolio including light commercial vehicles, pickups, MPVs, light trucks, heavy trucks and RVs, to meet global demands for efficient business growth and high-quality mobility.

As your journey evolves, MAXUS opens more possibilities ahead: new routes to opportunity, new ways to expand, and new potential waiting to be unlocked with every mile.

MAXUS Drives You Forward, Expanding What's Possible On Every Journey

Smart Technology
Smart innovations that streamline operations
Tech that makes your work easier

Trusted Reliability
Professional-grade durability proven on roads
Vehicles you can count on

High Efficiency
Purpose-built versatility for every business mission
Power to carry more and go further

A Super Electric Architecture for Commercial Vehicles

Delivering Exceptional TCO Performance for Users

Integrated Electric Triple-System Architecture: Maximizing Power and Efficiency

Compact Size | Huge Power | High Stability

Electric Drive

- 6-in-1 Integrated E-Drive System
- 16-in-1 Integrated E-Drive System

FiberShield Battery

- 140mm Battery
- Semi-Solid Ultra-Energy Battery on an 800V High-Voltage Platform

Integrated Thermal Management Technology

- Integrated Thermal Management System: At –15°C, it delivers 12.8% longer range than vehicles in its class.
- Thermal Management 2.0: Built to endure –25°C, breaking through extreme cold and expanding the boundaries of new-energy mobility.

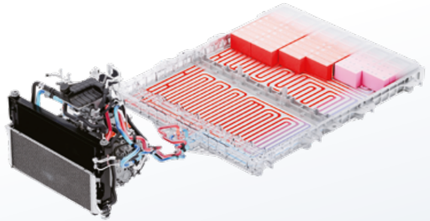

Master Chassis: Reimagined Space and Versatility

Body Architecture | Intelligent Chassis | Safety Standards

Master-Level Space

- Modular Body Architecture with More Flexible Space and Stronger Load Capability

Master-Level Performance

- Braking Distance Shortened by 5%
- Over 99% Energy Recuperation

Master-Level Safety

5A-Grade Safety Standard

3× Roof-Crush Resistance vs. National Standard | 3× Battery Safety vs. National Standard | A-Pillar Tensile Strength up to 1500 MPa | 1,500,000+ km Global All-Terrain Testing | 500mm Wading Depth & IP68 Battery Protection

Smart Commercial Features: Intelligence Within Reach

Intelligence | All-Scenario | High Safety

All-Scenario Commercial ADAS

19-function ADAS Suite, featuring Low-speed Collision Mitigation and Unintended Acceleration Suppression.

End-to-End Autonomous Logistics

Enabling Next-generation Logistics with All-time, All-target, Zero-blind-spot 360° Autonomous Operation.

eTERRON9

EXCELLENT PERFORMANCE

- 102kWh high-capacity battery
- Highly efficient four-wheel drive system
- WLTP range is up to 430 kilometres
- The powerful dual-motor layout, with 125kW front drive and 200kW rear drive
- Accelerating from 0 to 100km/h in just 5.8 seconds

DESIGN TO PROTECT

- Euro NCAP 5-star safety certification
- High-strength and ultra-high-strength steel account for up to 73% of the body structure
- Equipped with 7 airbags (including far side airbag)
- Equipped with Bosch ESP 9.3 system and Bosch IBS

ULTIMATE COMFORT

- 6.6kW high-power V2L discharge function
- Dual 12.3-inch LCD instrument screens
- L2-level intelligent assisted driving functions
- Air suspension

VERSION	BEV Double Cab N1	
	Luxury 4WD	Premium 4WD
DIMENSIONS		
Seating	5	5
Doors	4	4
Overall length (mm)	5500	5500
Overall width without mirrors (mm)	1997	1997
Overall height (mm)	1860	1874
Cargo box length (mm)	1658/1561	1658/1561
Cargo box width (mm)	1600	1600
Cargo box height (mm)	535	535
Wheelbase (mm)	3300	3300
Wading depth (mm)	550	550
Ground clearance (unladen, mm)	230	230
Angle of approach (unladen)	29°	29°
Angle of departure (unladen)	25°	25°
WEIGHTS AND PAYLOAD		
Max. GVM (kg)	3500	3500
Min. CVM (kg)	2850	2880
Max. Payload (kg)	650	620
Max. front axle load (kg)	1600	1600
Max. rear axle load (kg)	2100	2100
Max. towing (braked/unbraked) (kg)	3500/750	3500/750
PERFORMANCE AND STEERING		
Max. front power (kW)	125	125
Max. rear power (kW)	200	200
Max. front torque (N·m)	250	250
Max. rear torque (N·m)	450	450
Max. speed (km/h)	190	190
BATTERY AND CHARGING		
Battery energy (kWh)	102.2	102.2
WLTP combined range (km)	430	430
Onboard charger (kW)	11	11
5-100% AC charging - Onboard charger 3-phase tethered (hrs)	12	12
High-powered DC charger (kW)	115	115
20–80% DC charging (mins)	42	42
WHEELS AND TYRES		
Wheels	20-inch alloy wheel	20-inch alloy wheel
Tyres	275/55R20	275/55R20

Body Colour: Black(RAL9011) / White(RAL9016) / Desert Yellow(RAL1002) / Cement Grey(RAL7045) / Spruce Green(PANTONE 2212C)

430km WLTP Range (combined) / **325kW & 700N·m** Max. Power & Torque / **3300mm** Wheelbase / **650kg** Max. Payload

T60

COMFORTABLE DRIVING

EPB electronic parking brake is standard across the range, providing one-touch parking and automatic release when starting. More comfortable configurations are available, including front seat heating, steering wheel heating, and a 12.8-inch intelligent touch screen.

POWERFUL PERFORMANCE

Top speed of 165 km/h. Backed by 8 cutting-edge technologies, it delivers excellent fuel efficiency and low emissions.

SUPERIOR SAFETY

Advanced safety features including 70% high/ultra-high strength steel body, 3000mm laser welding, and LED headlights with automatic light-sensing (auto high-beam) with a maximum irradiation distance of over 400m.

VERSION	Diesel Double Cab N1	
	Elite 4WD	Luxury 4WD
DIMENSIONS		
Seating	5	5
Overall Length (mm)	5378	5378
Overall Width (mm)	1950	1950
Overall Height (mm)	1820	1870
Wheelbase (mm)	3155	3155
Cargo Box Length (mm)	1585	1585
Cargo Box Width (mm)	1510	1510
Cargo Box Height (mm)	530	530
Angle of approach (unladen)	27°	29°
Angle of departure (unladen)	25°	25°
WEIGHTS AND PAYLOAD		
Max. GVW (kg)	3210	3210
Min. CVW (kg)	2160	2160
Max. Payload (kg)	1050	1050
Max. front axle load (kg)	1365	1365
Max. rear axle load (kg)	1900	1925
Towing Capacity (Braked/Unbraked) (kg)	3500/750	3500/750
ENGINE AND TRANSMISSION		
Engine	Diesel D20T	Diesel D20T
Displacement (ml)	1996	1996
Max. Power (kW@rpm)	120 @ 4000	120 @ 4000
Max. Torque (N·m@rpm)	400 @ 1500-2400	400 @ 1500-2400
Max. Speed (km/h)	165	165
Transmissions	8AT	8AT
Driveline	4WD	4WD
WHEELS AND TYRES		
Tyre type	245/65R17HT	265/60R18HT
Spare tyre	●Steel 245/65R17HT	●Full Size-265/60R18HT

Body Colour: Warm White / Metal Grey / Metal Black / Chinese Red

2.0T Diesel
Powertrain

120kW & **400**N·m
Max. Power & Torque

3155mm
Wheelbase

1050kg
Max. Payload

T60MAX

POWERFUL CORE PERFORMANCE

- SAIC π 2.0T bi-turbo diesel engine with 500 N·m of super torque – the strongest in its class.
- Honeywell VGT + WGT bi-turbo technology, SAIC Blue Core.

SUPERIOR COMFORT

- Double linkage smart touch screen (12.3 inch LCD screen + 12.3 inch Touch screen)
- Front seat heating
- Integrated headrests, electric seats
- Automatic air conditioning

ADVANCED TECHNOLOGY

- 360° image
- MP5 + DAB Radio Bluetooth
- Apple CarPlay & Android Auto
- Mobile Phone Wireless Charging

VERSION	Double Cab
DIMENSIONS	
Seating	5
Doors	4
Overall Length (mm)	5395
Overall Width without mirrors (mm)	1960
Overall Height (mm)	1870
Cargo Box Length (mm)	1485
Cargo Box Width (mm)	1510
Cargo Box Height (mm)	530
Wheelbase (mm)	3155
Wading Depth (mm)	550
Ground Clearance (unladen, mm)	220
Angle of approach (unladen)	29°
Angle of departure (unladen)	26°
WEIGHTS AND PAYLOAD	
Max. GVM (kg)	3250
Min. CVM (kg)	2200
Payload (kg)	1050
Max. front axle load (kg)	1360
Max. rear axle load (kg)	1850
Max. Towing (Braked/Unbraked) (kg)	3500/750
ENGINE AND TRANSMISSION	
Engine	Diesel 2.0L Bi-Turbo
Displacement (ml)	1996
Max. Power (kW)	158.5
Max. Torque (N·m)	500
Max. Speed (km/h)	170
Emission Level	Euro 6
Transmission	8AT
WHEELS AND TYRES	
Wheels	18-inch alloy wheel
Tyres	265/60R18HT

1050kg Max. Payload / **3500kg** Max. Towing Capacity / **158.5kW & 500N·m** Max. Power & Torque / **Vehicle Remote Control**

eDELIVER9

EURO NCAP
FIVE-STAR

VERSION	VAN FWD N1					
	L2H2		L3H2		L3H3	
	77 kWh	88 kWh	77 kWh	88 kWh	77 kWh	88 kWh
DIMENSIONS						
Seating	3	3	3	3	3	3
Slide door	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual
Overall length (mm)	5546	5546	5940	5940	5940	5940
Overall width without mirrors (mm)	2062	2062	2062	2062	2062	2062
Overall height (mm)	2515	2515	2515	2515	2730	2730
Wheelbase (mm)	3366	3366	3760	3760	3760	3760
Max. load volume (with bulkhead) (cu.m)	9.7	9.7	11	11	12.3	12.3
WEIGHTS AND PAYLOAD						
Max. GVM (kg)	3500	3500	3500	3500	3500	3500
Min. kerb mass (kg)	2460	2530	2520	2590	2580	2650
Max. gross payload (kg)	1040	970	980	910	920	850
Max. GTM (kg)	4250	4250	4250	4250	4250	4250
Max. towing (Braked/Unbraked) (kg)	1500/750	1500/750	1500/750	1500/750	1500/750	1400/750
PERFORMANCE AND STEERING						
Max. power (kW)	150	150	150	150	150	150
Max. torque (N·m)	330	330	330	330	330	330
Max. speed (km/h)	100	100	100	100	100	100
Min. turning circle (m)	13.4	13.4	14.8	14.8	14.8	14.8
BATTERY AND CHARGING						
Battery energy (kWh)	77	88	77	88	77	88
WLTP combined range (km)	287	328	286	326	280	322
WLTP City range (km)	384	431	377	429	343	425
Onboard charger (kW)	11/22	11/22	11/22	11/22	11/22	11/22
5-100% AC charging - Onboard charger 3-phase tethered (hrs)	8.5/4.5	9.3/5.2	8.5/4.5	9.3/5.2	8.5/4.5	9.3/5.2
High-powered DC charger (kW)	78	90	78	90	78	90
10-80% DC charging (mins)	51	51	51	51	51	51
WHEELS AND TYRES						
Wheels	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel
Tyres	215/75R16	215/75R16	215/75R16	215/75R16	215/75R16	215/75R16

VERSION	CAB FWD N1			
	L3H0		L4H0	
	77 kWh	88 kWh	77 kWh	88 kWh
DIMENSIONS				
Seating	3	3	3	3
Overall length (mm)	6200	6200	6680	6680
Overall width without mirrors (mm)	2052	2052	2052	2052
Overall height (mm)	2310	2310	2310	2310
Wheelbase (mm)	3760	3760	4048	4048
WEIGHTS AND PAYLOAD				
Max. GVM (kg)	3500	3500	3500	3500
Min. kerb mass (kg)	2155	2215	2165	2225
Max. gross payload (kg)	1345	1285	1335	1275
Max. GTM (kg)	4250	4250	4250	4250
Max. towing (Braked/Unbraked) (kg)	2000/750	2000/750	2000/750	2000/750
PERFORMANCE AND STEERING				
Max. power (kW)	150	150	150	150
Max. torque (N·m)	330	330	330	330
Max. speed (km/h)	100	100	100	100
Min. turning circle (m)	14.8	14.8	15.8	15.8
BATTERY AND CHARGING				
Battery energy (kWh)	77	88	77	88
WLTP combined range (km)	196–272	223–320	195–271	220–316
WLTP City range (km)	303–381	381–456	302–380	379–453
Onboard charger (kW)	11/22	11/22	11/22	11/22
5-100% AC charging - Onboard charger 3-phase tethered (hrs)	8.5/4.5	9.3/5.2	8.5/4.5	9.3/5.2
High-powered DC charger (kW)	78	90	78	90
10-80% DC charging (mins)	51	51	51	51
WHEELS AND TYRES				
Wheels	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel
Tyres	215/75R16	215/75R16	215/75R16	215/75R16

Body Colour: Black(RAL9011) / White(RAL9016) / Argent(RAL9022) / Mica Blue(RAL5014)

77 / 88kWh
Battery Capacity

150kW & 330N·m
Max. Power & Torque

328km
WLTP Max. Range (combined)

Van 1040kg Cab 1345kg
Max. Payload

eDELIVER9

EURO NCAP FIVE-STAR

VERSION	VAN RWD N2			
	L3H2		L3H3	
	88 kWh	100 kWh	88 kWh	100 kWh
DIMENSIONS				
Seating	3	3	3	3
Slide door	Single	Single	Single	Single
Overall length (mm)	5940	5940	5940	5940
Overall width without mirrors (mm)	2062	2062	2062	2062
Overall height (mm)	2555	2555	2770	2770
Wheelbase (mm)	3760	3760	3760	3760
Max. load volume (with bulkhead) (cu.m)	11	11	12.3	12.3
WEIGHTS AND PAYLOAD				
Max. GVM (kg)	4250	4250	4250	4250
Min. kerb mass (kg)	2720	2760	2780	2820
Max. gross payload (kg)	1530	1490	1470	1430
Max. GTM (kg)	6000	6000	6000	6000
Max. towing (Braked/Unbraked) (kg)	2000/750	2000/750	2000/750	2000/750
PERFORMANCE AND STEERING				
Max. power (kW)	170	170	170	170
Max. torque (N·m)	330	330	330	330
Max. speed (km/h)	90	90	90	90
Min. turning circle (m)	14.1	14.1	14.1	14.1
BATTERY AND CHARGING				
Battery energy (kWh)	88	100	88	100
WLTP combined range (km)	312	370	300	360
WLTP City range (km)	396	445	384	425
Onboard charger (kW)	11/22	11/22	11/22	11/22
5-100% AC charging - Onboard charger 3-phase tethered (hrs)	9.3/5.2	10.5/5.9	9.3/5.2	10.5/5.9
High-powered DC charger (kW)	90	100	90	100
10-80% DC charging (mins)	51	47	51	47
WHEELS AND TYRES				
Wheels	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel
Tyres	235/65R16	235/65R16	235/65R16	235/65R16

VERSION	CAB RWD N2			
	L3H0		L4H0	
	88 kWh	100 kWh	88 kWh	100 kWh
DIMENSIONS				
Seating	3	3	3	3
Overall length (mm)	6200	6200	6680	6680
Overall width without mirrors (mm)	2052	2052	2052	2052
Overall height (mm)	2310	2325	2325	2325
Wheelbase (mm)	3760	3760	4048	4048
WEIGHTS AND PAYLOAD				
Max. GVM (kg)	4250	4250	4250	4250
Min. kerb mass (kg)	2310	2350	2320	2360
Max. gross payload (kg)	1940	1900	1930	1890
Max. GTM (kg)	6000	6000	6000	6000
Max. towing (Braked/Unbraked) (kg)	2000/750	2000/750	2000/750	2000/750
PERFORMANCE AND STEERING				
Max. power (kW)	170	170	170	170
Max. torque (N·m)	330	330	330	330
Max. speed (km/h)	90	90	90	90
Min. turning circle (m)	14.1	14.1	15.2	15.2
BATTERY AND CHARGING				
Battery energy (kWh)	88	100	88	100
WLTP combined range (km)	155–230	196–280	155–230	195–278
WLTP City range (km)	245–330	273–400	245–330	270–390
Onboard charger (kW)	11/22	11/22	11/22	11/22
5-100% AC charging - Onboard charger 3-phase tethered (hrs)	9.3/5.2	10.5/5.9	9.3/5.2	10.5/5.9
High-powered DC charger (kW)	90	100	90	100
10-80% DC charging (mins)	51	47	51	47
WHEELS AND TYRES				
Wheels	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel
Tyres	235/65R16	235/65R16	235/65R16	235/65R16

Body Colour: Black(RAL9011) / White(RAL9016) / Argent(RAL9022) / Mica Blue(RAL5014)

88 / 100kWh
Battery Capacity

170kW & 330N·m
Max. Power & Torque

370km
WLTP Max. Range (combined)

Van 1530kg Cab 1940kg
Max. Payload

DELIVER9

EURO NCAP FIVE-STAR

110kW & 375N·m
Max. Power & Torque

12.9m³
Max. Cargo Volume

Van 1215kg Cab 1520kg
Max. Payload

VERSION	VAN FWD/RWD N1			
	L3H2		L3H3	
	FWD	RWD	FWD	RWD
DIMENSIONS				
Seating	3	3	3	3
Slide door	Single/Dual	Single	Single/Dual	Single/Dual
Overall length (mm)	5940	5940	5940	5940
Overall width without mirrors (mm)	2062	2062	2062	2062
Overall height (mm)	2535	2535	2755	2755
Wheelbase (mm)	3760	3760	3760	3760
Max. load volume (with bulkhead) (cu.m)	11.5	11	12.9	12.3
WEIGHTS AND PAYLOAD				
Max. GVM (kg)	3500	3500/4000	3500	3500/4000
Min. kerb mass (kg)	2285	2360/2400	2300	2390/2420
Max. gross payload (kg)	1215	1140	1200	1110
Max. GTM (kg)	6000	6300	6000	6300
Max. towing (Braked/Unbraked) (kg)	2800/750	2800/750	2800/750	2800/750
PERFORMANCE AND STEERING				
Max. power (kW)	110	110	110	110
Max. torque (N·m)	375	375	375	375
Max. speed (km/h)	160	140	160	140
Min. turning circle (m)	14.1	14.1	14.1	14.1
ENGINE AND TRANSMISSION				
Engine	D20T			
Displacement (ml)	1996			
Fuel	Diesel			
Emission level	EURO VI			
Transmission	6MT			
WHEELS AND TYRES				
Wheels	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel
Tyres	215/75R16	235/65R16	215/75R16	235/65R16

VERSION	CAB N1			
	L3H0		L4H0	
	RWD（SRW）	RWD（DRW）	RWD（SRW）	RWD（DRW）
DIMENSIONS				
Seating	3	3	3	3
Overall length (mm)	6200	6200	6680	6680
Overall width without mirrors (mm)	2052	2094	2052	2094
Overall height (mm)	2320	2320	2320	2320
Wheelbase (mm)	3760	3760	4048	4048
WEIGHTS AND PAYLOAD				
Max. GVM (kg)	3500	3500/4495	3500	3500/4495
Min. kerb mass (kg)	1980	2050/2110	2010	2080/2140
Max. gross payload (kg)	1520	1450	1490	1420
Max. GTM (kg)	6000	6000	6000	6000
Max. towing (Braked/Unbraked) (kg)	2800/750	2800/750	2800/750	2800/750
PERFORMANCE AND STEERING				
Max. power (kW)	110	110	110	110
Max. torque (N·m)	375	375	375	375
Max. speed (km/h)	145	145	145	145
Min. turning circle (m)	14.1	14.1	15.2	15.2
ENGINE AND TRANSMISSION				
Engine	D20T			
Displacement (ml)	1996			
Fuel	Diesel			
Emission level	EURO VI / EURO 6			
Transmission	6MT	6MT/8AT	6MT	6MT/8AT
WHEELS AND TYRES				
Wheels	16-inch steel/alloy wheel	16-inch steel wheel	16-inch steel/alloy wheel	16-inch steel wheel
Tyres	235/65R16	195/75R16	235/65R16	195/75R16

Body Colour: Black(RAL9011) / White(RAL9016) / Argent(RAL9022) / Mica Blue(RAL5014)

eDELIVER7 AWD

VERSION	VAN AWD N1		
	L1H1	L2H1	L2H2
	88 kWh	88 kWh	88 kWh
DIMENSIONS			
Seating	2/3	2/3	2/3
Slide door	Single/Dual	Single/Dual	Single/Dual
Overall length (mm)	5079	5445	5445
Overall width without mirrors (mm)	2030	2030	2030
Overall height (mm)	1999	1999	2415
Wheelbase (mm)	3000	3366	3366
Max. load volume (with bulkhead) (cu.m)	5.9	6.7	8.7
WEIGHTS AND PAYLOAD			
Max. GVM (kg)	3500	3500	3500
Min. kerb mass (kg)	2510	2560	2590
Max. gross payload (kg)	990	940	910
Max. GTM (kg)	5000	5000	5000
Max. towing (Braked/Unbraked) (kg)	2000/750	2000/750	2000/750
PERFORMANCE AND STEERING			
Max. front power (kW)	90	90	90
Max. rear power(kW)	170	170	170
Max. front torque (N·m)	190	190	190
Max. rear torque (N·m)	330	330	330
Max. speed (km/h)	120	120	120
Min. turning circle (m)	12.1	13.4	13.4
BATTERY AND CHARGING			
Battery energy (kWh)	88	88	88
WLTP combined range (km)	335	332	305
WLTP City range (km)	443	464	432
Onboard charger (kW)	11	11	11
5-100% AC charging – Onboard charger 3-phase tethered (hrs)	9.3	9.3	9.3
High-powered DC charger (kW)	89	89	89
20-80% DC charging (mins)	43	43	43
WHEELS AND TYRES			
Wheels	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel
Tyres	215/70R16	215/70R16	215/75R16
WINDOW PACKAGE			
Window Package (Privacy Glass)	–	O	O

Body Colour: Black(RAL9011) / White(RAL9016) / Iron Grey(RAL7012) / Mica Blue(RAL5014)

EURO NCAP FIVE-STAR

260kW & 520N·m
Max. Power & Torque

8.7m³
Max. Cargo Volume

990kg
Max. Payload

eDELIVER7 FWD

VERSION	VAN FWD N1				
	L1H1		L2H1		L2H2
	77 kWh	88 kWh	77 kWh	88 kWh	88 kWh
DIMENSIONS					
Seating	2/3	2/3	2/3	2/3	2/3
Slide door	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual
Overall length (mm)	5079	5079	5445	5445	5445
Overall width without mirrors (mm)	2030	2030	2030	2030	2030
Overall height (mm)	1990	1990	1990	1990	2390
Wheelbase (mm)	3000	3000	3366	3366	3366
Max. load volume (with bulkhead) (cu.m)	5.9	5.9	6.7	6.7	8.7
WEIGHTS AND PAYLOAD					
Max. GVM (kg)	3500	3500	3500	3500	3500
Min. kerb mass (kg)	2300	2375	2365	2445	2475
Max. gross payload (kg)	1200	1125	1135	1055	1025
Max. GTM (kg)	5000	5000	5000	5000	5000
Max. towing (Braked/Unbraked) (kg)	2000/750	2000/750	2000/750	2000/750	2000/750
PERFORMANCE AND STEERING					
Max. power (kW)	150	150	150	150	150
Max. torque (N·m)	330	330	330	330	330
Max. speed (km/h)	120	120	120	120	120
Min. turning circle (m)	12.1	12.1	13.4	13.4	13.4
BATTERY AND CHARGING					
Battery energy (kWh)	77	88	77	88	88
WLTP combined range (km)	318	370	310	362	328
WLTP City range (km)	485	542	452	524	469
Onboard charger (kW)	11	11	11	11	11
5-100% AC charging - Onboard charger 3-phase tethered (hrs)	8	9.3	8	9.3	9.3
High-powered DC charger (kW)	78	89	78	89	89
20-80% DC charging (mins)	43	43	43	43	43
WHEELS AND TYRES					
Wheels	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel
Tyres	215/65R16	215/65R16	215/65R16	215/65R16	215/75R16
WINDOW PACKAGE					
Window Package (Privacy Glass)	–	–	○	○	○

Body Colour: Black(RAL9011) / White(RAL9016) / Iron Grey(RAL7012) / Mica Blue(RAL5014)

EURO NCAP FIVE-STAR

150kW & 330N·m
Max. Power & Torque

8.7m³
Max. Cargo Volume

1200kg
Max. Payload

DELIVER 7

EXTERIOR & INTERIOR

- Wing-shaped front design and diamond-patterned grill
- LED DRL & Auto Headlight
- 10 Way Adjustable Driver Seat

SAFETY

- Euro NCAP five-star rating for commercial vans
- Six Airbags

INFOTAINMENT & CONNECTIVITY

- Touch Screen 12.3-inch + 360° Camera
- MP5 + DAB Radio Bluetooth
- Apple CarPlay & Android Auto

VERSION	VAN FWD N1		
	L1H1	L2H1	L2H2
	FWD	FWD	FWD
DIMENSIONS			
Seating	3	3	3
Slide door	Single/Dual	Single/Dual	Single/Dual
Overall length (mm)	4998	5364	5364
Overall width without mirrors (mm)	2030	2030	2030
Overall height (mm)	1998	1998	2420
Wheelbase (mm)	3000	3366	3366
Max. load volume (with bulkhead) (cu.m)	6.3	7.2	9.2
WEIGHTS AND PAYLOAD			
Max. GVM (kg)	3370	3370	3500
Min. kerb mass (kg)	2040	2090	2150
Max. gross payload (kg)	1330	1280	1350
Max. GTM (kg)	5870	5870	5870
Max. towing (Braked/Unbraked) (kg)	2500/750	2500/750	2370/750
PERFORMANCE AND STEERING			
Max. power (kW)	123	123	123
Max. torque (N·m)	385	385	385
ENGINE AND TRANSMISSION			
Engine	D20T		
Displacement (ml)	1996		
Fuel	Diesel		
Emission level	EURO 6e/EURO 5		
Transmission	9AT		
WHEELS AND TYRES			
Wheels	16-inch steel/alloy wheel	16-inch steel/alloy wheel	16-inch steel/alloy wheel
Tyres	215/65R16	215/65R16	215/75R16

Body Colour: Black(RAL9011) / White(RAL9016) / Argent(RAL9022) / Iron Grey(RAL7012) / Mica Blue(RAL5014)

EURO NCAP FIVE-STAR

123kW & 385N·m Max. Power & Torque

9.2m³ Max. Cargo Volume

1300kg Max. Payload

eDELIVER5

VERSION	VAN FWD N1								CAB FWD N1
	L1H1		L1H2		L2H1		L2H2		L2H0
	50 kWh	64 kWh	50 kWh	64 kWh	50 kWh	64 kWh	50 kWh	64 kWh	50 kWh
DIMENSIONS									
Seating	2/3	2/3	2/3	2/3	2/3	2/3	2/3	2/3	2
Slide door	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual	–
Overall length (mm)	4980	4980	4980	4980	5430	5430	5430	5430	5280
Overall width without mirrors (mm)	1870	1870	1870	1870	1870	1870	1870	1870	1870
Overall height (mm)	1960	1960	2180	2180	1960	1960	2180	2180	1960
Wheelbase (mm)	3100	3100	3100	3100	3450	3450	3450	3450	3450
Max. load volume (with bulkhead) (cu.m)	6.6	6.6	7.6	7.6	7.5	7.5	8.7	8.7	–
WEIGHTS AND PAYLOAD									
Max. GVM (kg)	3040	3050	3040	3050	3130	3195	3130	3195	3000
Min. kerb mass (kg)	1740	1850	1740	1850	1820	1930	1820	1930	1510
Max. gross payload (kg)	1300	1200	1300	1200	1310	1265	1310	1265	1490
Max. GTM (kg)	4540	4550	4540	4550	4630	4695	4630	4695	4500
Max. towing (Braked/Unbraked) (kg)	1500/750	1500/750	1500/750	1500/750	1500/750	1500/750	1500/750	1500/750	1500/750
PERFORMANCE AND STEERING									
Max. power (kW)	120	120	120	120	120	120	120	120	120
Max. torque (N·m)	240	240	240	240	240	240	240	240	240
Max. speed (km/h)	120	120	120	120	120	120	120	120	120
Min. turning circle (m)	11.5	11.5	11.5	11.5	12.8	12.8	12.8	12.8	12.8
BATTERY AND CHARGING									
Battery energy (kWh)	50	64	50	64	50	64	50	64	50
WLTP combined range (km)	245	335	235	305	235	321	229	301	141-201
WLTP City range (km)	349	489	340	467	332	454	320	436	235-319
Onboard charger (kW)	11	11	11	11	11	11	11	11	11
20-80% AC charging-Onboard charger 3-phase tethered (hrs)	3.5	4	3.5	4	3.5	4	3.5	4	3.5
High-powered DC charger (kW)	77	70	77	70	77	70	77	70	77
20-80% DC charging (mins)	25	36	25	36	25	36	25	36	25
WHEELS AND TYRES									
Wheels	16-inch alloy wheel	16-inch alloy wheel	16-inch alloy wheel	16-inch alloy wheel	16-inch alloy wheel	16-inch alloy wheel	16-inch alloy wheel	16-inch alloy wheel	16-inch alloy wheel
Tyres	195/65 R16	195/65 R16	195/65 R16	195/65 R16	195/65 R16	195/65 R16	195/65 R16	195/65 R16	195/65 R16
WINDOW PACKAGE									
Window Package	–	–	–	○	○	–	–	–	–

Body Colour: Black(RAL9011) / White(RAL9016) / Cement Grey(RAL7045)

EURO NCAP FIVE-STAR

120kW & 240N·m
Max. Power & Torque

8.7m³
Max. Cargo Volume

1310kg
Max. Payload

eDELIVER75

SUPERIOR LOADING CAPACITY

4.5-ton payload with maximum towing capacity of 3.5 tons
Flexible wheelbase options (3400mm/4500mm) for diverse applications
Reinforced frame design (230mm height, 860mm width) for enhanced stability
Electric drive rear axle for improved load distribution

ADVANCED SAFETY & INTELLIGENCE

Comprehensive ADAS package with FCW, AEB, LDW and 360° view
Multi-language intelligent connectivity with Apple CarPlay and Android Auto
Ergonomic cabin design with heated seats and intuitive controls

EFFICIENT & RELIABLE ELECTRIC POWERTRAIN

A 150kW motor with 440N·m peak torque, three driving modes, EPS steering and optimized NVH for quiet, precise handling.
Equipped with a 120kWh CATL LFP battery, it delivers a 250+km WLTP range, 50% fast charge in 38 minutes, and supports V2L & V2V external discharge.

VERSION	TRUCK RWD N2	
	SWB	LWB
DIMENSIONS		
Seating	3	3
Overall length (mm)	5958	7973
Overall width without mirrors (mm)	2145	2145
Overall height (mm)	2300	2300
Wheelbase (mm)	3400	4500
Maximum permissible modification structure length (mm)	4985	6800
Maximum permissible modification structure width (mm)	2500	2500
Maximum permissible modification structure height (mm)	3170	3150
WEIGHTS AND PAYLOAD		
Max. GVM (kg)	7490	7490
Min. CVM (kg)	2900	3010
Payload (kg)	4590	4480
Max. axle load: front/rear (kg)	3000/6000	3000/6000
PERFORMANCE AND STEERING		
Max. power (kW)	150	150
Max. torque (N·m)	440	440
Max. speed (km/h)	90	90
Min. turning circle (m)	12	14.6
BATTERY AND CHARGING		
Battery energy (kWh)	120	120
WLTP combined range (GVW, km)	280	280
Onboard charger (kW)	11/22	11/22
5-100% AC charging - Onboard charger 3-phase tethered (hrs)	11/6.8	11/6.8
High-powered DC charger (kW)	120	120
20-80% DC charging (mins)	38	38
WHEELS AND TYRES		
Wheels	17.5-inch alloy wheel	17.5-inch alloy wheel
Tyres	205/75R17.5	205/75R17.5

Body Colour: White(RAL9016)

280 km
WLTP Range (combined)

4590kg
Max. Payload

150kW & 440N·m
Max. Power & Torque